


PULSANTE IR RGB - IP68

PB01

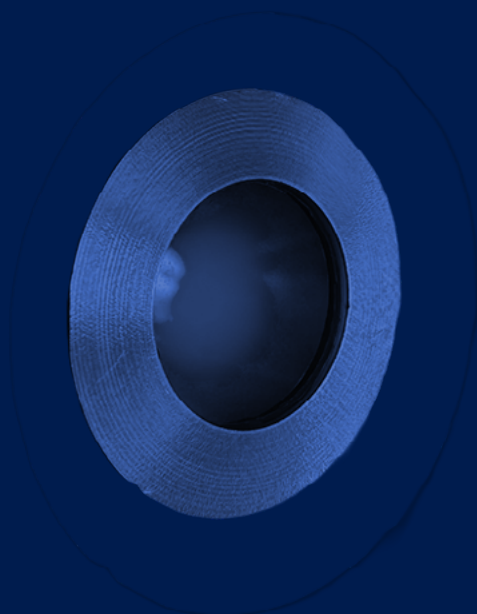


PULSANTE IR RGB - IP68

Pulsante da incasso retroilluminato

Backlit recessed RGB button

PB01

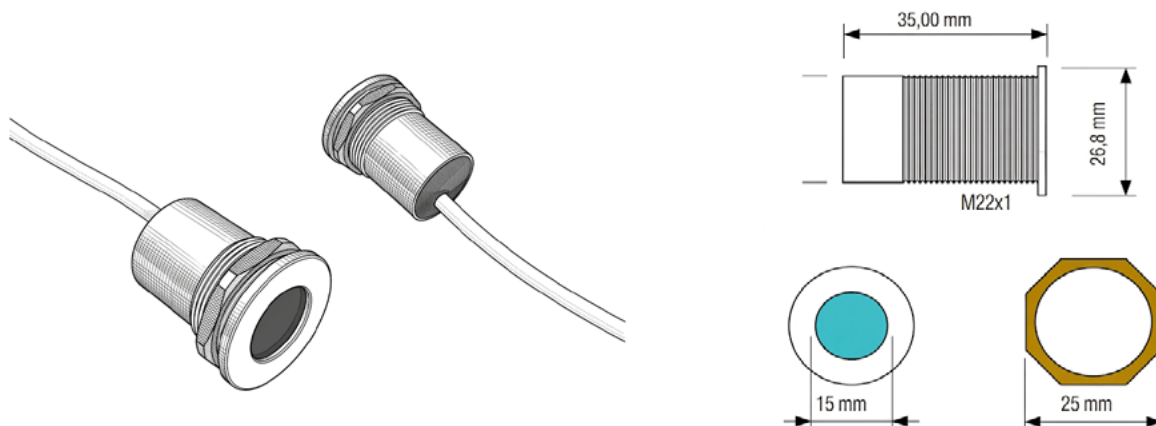

Categoria / Category	Parametro (IT)	Valore (IT)
Cassa / Case	Corpo	Acciaio AISI 316
Cassa / Case	Anello fissaggio	Ottone nichelato
Cassa / Case	Vetrino	Polimetilmetacrilato opalino
Dati elettrici / Electric datas	Led	RGB
Dati elettrici / Electric datas	Volts	12 / 24 Volts
Dati elettrici / Electric datas	Contatto Relay	max 60 Vdc 200 mA
Grado di protezione / Protection rate	Resina	Poliuretanic (PUR)
Grado di protezione / Protection rate	Grado di protezione	IP68
Cavo / Cable	Cavo	Unitronic LIYY 7x0.34
Cavo / Cable	Lunghezza standard	12 mt
Note / Notes		Il pulsante non è dotato di parte ad incasso; installazione libera in loco.

Parameter (EN)	Value (EN)
Body	Stainless Steel AISI 316
Fixing Ring	Nichel brass
Glass	Polimetilmetacrilate opalin
Led	RGB
Volts	12 / 24 Volts
Relay contact	max 60 Vdc 200 mA
Resin	Poliurethanic (PUR)
Protection rate	IP68
Cable	Unitronic LIYY 7x0.34
Standard length	12 mt
	The button has no flush-mounting part; free installation on site.

Finiture / Finishes

	PVD					Verniciate Painted	
Lucido Glossy							
Spazzolato Brushed							
	Acciaio AISI 316L	Gold	Light Gold	Copper Bronze	Gun Metal	Black	White